



YÜKSEK BASINÇLI METAL BUHARLI LAMBALAR İÇİN MANYETİK BALASTLAR

230 V

50 Hz

70w-400w

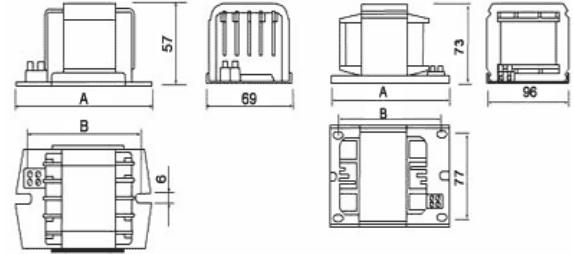


Fig: A
B

Fig:

Dimension in mm,
with tolerance ± 1

LAMP	BALLASTS								PARALEL COMPENSATION	
	Wattage w	TYPE	Weight kg	ΔT K	*Power Los W	Current A	Cos ϕ	Diagram	Dimension A B	Capacitor $\mu F \pm 10\%$
70	MH-0070	1,35	65	13	1,0	0,36	Fig A	115 97	12	0,43
150	MH-0150	2,5	70	20	1,80	0,40	Fig B	116 99	20	0,8
150	MH-T150	2,18	70	20	1,80	0,40	Fig A	150 137	20	0,8
250	MH-0250	3,1	70	30	3,0	0,40	Fig B	135 115	32	1,3
400	MH-0400	4,8	70	39	3,5	0,50	Fig B	146 125	40	2,5

* Mean value, measured at 25°C copper temperature

** Cos $\phi > 0,90$