İletişim
Yüksek Gerilim Kabloları
Telefon: +90 212 266 01 60
eservice-power.turkey@nexans.com

# YVV-U Kumanda kabloları

NYY

0,6 / 1kV PVC İzoleli,kumanda kabloları

## Açıklama

**Uygulama Alanı:**

Kumanda kablosu olarak enerji santrallerinde,fabrika ve her türlü kumanda sisteminin bulunduğu yerlerde dahilde, hariçte veya toprak altında kullanılır.

**Yapısı:**

1. İletken:Bakır
2. İzole:PVC
3. Dolgu:PVC
4. Dış kılıf:PVC

**Damar renkleri:**

Siyah numaralı damarlar + yeşil/sarı

**Markalama:**

<>TSE<> NEXANS TS IEC 60502 YVV-U 48G1.5 0,6/1 kV 2009 (Metraj)

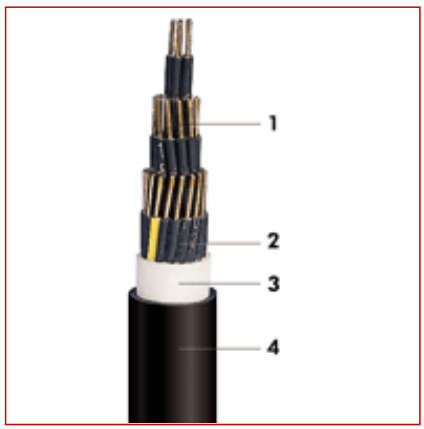


Standartlar
**Ulusal** TS IEC 60502

## Özellikler listesi

| Damar Sayısı | 5 | 5 | 7 | 7 | 10 | |
|---|---|---|---|---|---|---|
| Akım taşıma kapasitesi (havada) | 14 | 19 | 12 | 16 | 10 | A |
| İletken DC Direnci | 12,1 | 7,41 | 12,1 | 7,41 | 12,1 | Ohm/km |
| Dış çap (nominal) | 13,0 | 14,0 | 14,0 | 15,0 | 17,0 | mm |
| Akım taşıma kapasitesi (toprakta) | 18 | 24 | 16 | 20 | 13 | A |
| Yaklaşık ağırlık | 260 | 350 | 350 | 400 | 450 | kg/km |
| İletken kesiti | 1,5 | 2,5 | 1,5 | 2,5 | 1,5 | $mm^2$ |

| Damar Sayısı | 10 | 12 | 12 | 14 | 14 | |
|---|---|---|---|---|---|---|
| Akım taşıma kapasitesi (havada) | 14 | 10 | 13 | 9 | 13 | A |
| İletken DC Direnci | 7,41 | 12,1 | 7,41 | 12,1 | 7,41 | Ohm/km |
| Dış çap (nominal) | 18,5 | 17,5 | 19,0 | 18,0 | 20,0 | mm |
| Akım taşıma kapasitesi (toprakta) | 17 | 12 | 16 | 12 | 15 | A |
| Yaklaşık ağırlık | 575 | 500 | 650 | 550 | 700 | kg/km |
| İletken kesiti | 2,5 | 1,5 | 2,5 | 1,5 | 2,5 | $mm^2$ |


All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

İletişim
Yüksek Gerilim Kabloları
Telefon: +90 212 266 01 60
eservice-power.turkey@nexans.com

# YVV-U Kumanda kabloları

| Damar Sayısı | 19 | 19 | 21 | 21 | 24 | |
|---|---|---|---|---|---|---|
| Akım taşıma kapasitesi (havada) | 8 | 11 | 8 | 11 | 7 | A |
| İletken DC Direnci | 12,1 | 7,41 | 12,1 | 7,41 | 12,1 | Ohm/km |
| Dış çap (nominal) | 20,0 | 22,0 | 21,0 | 23,0 | 23,0 | mm |
| Akım taşıma kapasitesi (toprakta) | 10 | 14 | 10 | 13 | 9 | A |
| Yaklaşık ağırlık | 650 | 870 | 700 | 950 | 800 | kg/km |
| İletken kesiti | 1,5 | 2,5 | 1,5 | 2,5 | 1,5 | mm² |

| Damar Sayısı | 24 | 30 | 30 | 40 | 40 | |
|---|---|---|---|---|---|---|
| Akım taşıma kapasitesi (havada) | 10 | 7 | 9 | 7 | 9 | A |
| İletken DC Direnci | 7,41 | 12,1 | 7,41 | 12,1 | 7,41 | Ohm/km |
| Dış çap (nominal) | 25,0 | 25,0 | 27,0 | 27,0 | 30,0 | mm |
| Akım taşıma kapasitesi (toprakta) | 12 | 9 | 11 | 8 | 10 | A |
| Yaklaşık ağırlık | 1100 | 1000 | 1300 | 1220 | 1700 | kg/km |
| İletken kesiti | 2,5 | 1,5 | 2,5 | 1,5 | 2,5 | mm² |

| Damar Sayısı | 48 | 48 | 61 | 61 | |
|---|---|---|---|---|---|
| Akım taşıma kapasitesi (havada) | 6 | 8 | 6 | 8 | A |
| İletken DC Direnci | 12,1 | 7,41 | 12,1 | 7,41 | Ohm/km |
| Dış çap (nominal) | 30,0 | 33,0 | 32,0 | 36,0 | mm |
| Akım taşıma kapasitesi (toprakta) | 7 | 10 | 7 | 9 | A |
| Yaklaşık ağırlık | 1450 | 2000 | 1800 | 2500 | kg/km |
| İletken kesiti | 1,5 | 2,5 | 1,5 | 2,5 | mm² |

## Ürün Listesi

=Make to order, =Make to stock

| Nexans ref. | İsim | İletken kesiti (mm²) | Damar Sayısı |
|---|---|---|---|
| 12 A05B5T 1110000A13L000 | 5G1.5 mm2 | 1,5 | 5 |
| 41 A07B5T 1110000A13L000 | 7G1.5 mm2 | 1,5 | 7 |
| 41 A10B5T 1110000A13L000 | 10G1.5 mm2 | 1,5 | 10 |
| 41 A12B5T 1110000A13L000 | 12G1.5 mm2 | 1,5 | 12 |
| 41 A14B5T 1110000A13L000 | 14G1.5 mm2 | 1,5 | 14 |
| 41 A19B5T 1110000A13L000 | 19G1.5 mm2 | 1,5 | 19 |
| 41 A21B5T 1110000A13L000 | 21G1.5 mm2 | 1,5 | 21 |
| 41 A24B5T 1110000A13L000 | 24G1.5 mm2 | 1,5 | 24 |
| 41 A30B5T 1110000A13L000 | 30G1.5 mm2 | 1,5 | 30 |
| 41 A40B5T 1110000A13L000 | 40G1.5 mm2 | 1,5 | 40 |
| 41 A48B5T 1110000A13L000 | 48G1.5 mm2 | 1,5 | 48 |
| 41 A61B5T 1110000A13L000 | 61G1.5 mm2 | 1,5 | 61 |
| 12 A05C5T 1110000A13L000 | 5G2.5 mm2 | 2,5 | 5 |
| 41 A07C5T 1110000A13L000 | 7G 2.5 mm2 | 2,5 | 7 |
| 41 A10C5T 1110000A13L000 | 10G2.5 mm2 | 2,5 | 10 |
| 41 A12C5T 1110000A13L000 | 12G2.5 mm2 | 2,5 | 12 |
| 41 A14C5T 1110000A13L000 | 14G2.5 mm2 | 2,5 | 14 |

= Make to order, = Make to stock



All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

İletişim
Yüksek Gerilim Kabloları
Telefon: +90 212 266 01 60
eservice-power.turkey@nexans.com

# YVV-U Kumanda kabloları

| Nexans ref. | İsim | İletken kesiti (mm²) | Damar Sayısı |
|---|---|---|---|
| 41 A19C5T 1110000A13L000 | 19G2.5 mm2 | 2,5 | 19 |
| 41 A21C5T 1110000A13L000 | 21G2.5 mm2 | 2,5 | 21 |
| 41 A24C5T 1110000A13L000 | 24G2.5 mm2 | 2,5 | 24 |
| 41 A30C5T 1110000A13L000 | 30G2.5 mm2 | 2,5 | 30 |
| 41 A40C5T 1110000A13L000 | 40G2.5 mm2 | 2,5 | 40 |
| 41 A48C5T 1110000A13L000 | 48G2.5 mm2 | 2,5 | 48 |
| 41 A61C5T 1110000A13L000 | 61G2.5 mm2 | 2,5 | 61 |

= Make to order, = Make to stock

## Satış dağıtım bilgisi

**Markalama**

<>TSE<> NEXANS TS IEC 60502 YVV-U 48 G 1,5 0,6/1 kV 2009 (Metraj)



All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.