




YÜKSEK BASINÇ CIVA BUHAR LAMBALARI İÇİN MANYETİK BALASTLAR

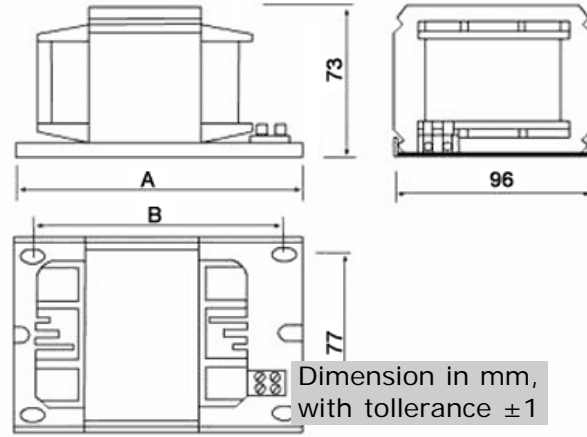

LAMP	BALLASTS								PARALEL COMPENSATION		
	Wattage w	TYPE	Weight kg	ΔT K	*Power Los W	Current A	Cos ϕ	Dimension	Capacitor $\mu F \pm 10\%$	**Line Current A	
								A	B		
250	CV-0250	3,2	70	18	2,15	0,55	135	115	18	1,3	
400	CV-0400	3,6	70	25	3,25	0,55	135	115	25	2,0	
700	CV-0700	4,2	70	36	5,45	0,50	146	126	40	3,5	

* Mean value, measured at 25°C copper temperature

** Cos ϕ > 0,90